




PacTronics Inc
 15375 Barranca Pkwy H108
 Irvine, CA 92618-2209
 800-607-2243 949-502-5599 FAX
 www.pactronics.com

VHF AND UHF TRANSCEIVERS

IC-F3011 (VHF transceiver)

IC-F4011 (UHF transceiver)

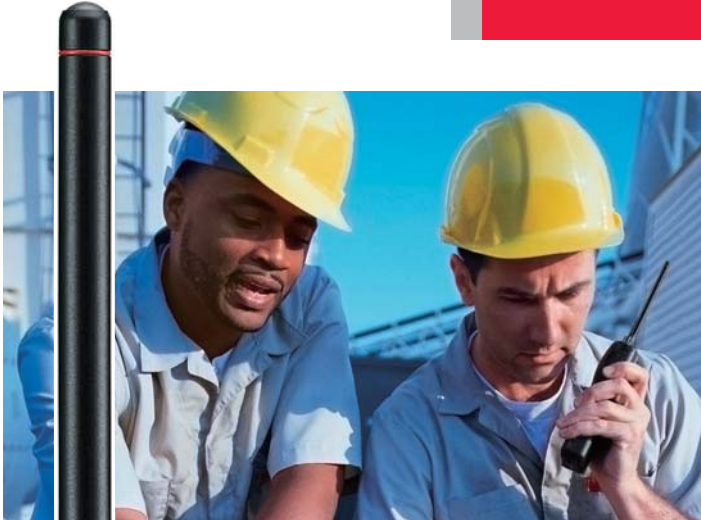

IP54

Rugged
MIL-STD 810



◀ IC-F3011(VHF)

Simple, Rugged & Reliable at an unbelievable price!

Simple operation for instant communication

With only 3 buttons, one volume knob and one 16-position channel knob, the IC-F3011 series does not require special training to use. The large knobs and positive action buttons are easy-to-operate, even while wearing gloves.

Modern design, rugged body

The IC-F3011 series is compact (120mm; 4²³/₃₂ inch height) and light weight (approximate 300g; 10.6oz with BP-232N and antenna). The aluminum die-cast chassis is the basis for this rugged construction, allowing long-life usage in various environments.

MIL-STD and IP54 rugged construction

The radio is tested to MIL-STD 810 specifications and to the IP54 rating for dust protection and water resistance. The IC-F3011 series is built to take harsh use and keep working.

Lithium-Ion battery standard

The IC-F3011 series comes with a high capacity 2000mAh (typ.) Li-Ion battery pack, BP-232N, as standard. The BP-232N offers up to 16 hours* of operation.

* VHF typical operation with Tx:Rx:Stand-by ratio =5:5:90

CTCSS/DTCS tone encoder/decoder

The IC-F3011 series has the built-in CTCSS and DTCS capabilities as standard to access a repeater or to set up your own talk group for quiet stand-by.

Rapid battery charger supplied

The rapid desktop charger, BC-160 and AC adapter BC-145 is supplied with the radio. It charges the BP-232N Li-Ion battery in 3 hours (approx.).

Automatic scanning and priority scan

The power on scan function automatically starts scanning when turning on the radio. The priority scan function scans all programmed channels in sequence, while monitoring the priority channel.

Other features

- Low battery alert with blinking LED and low battery beep
- Wide frequency coverage (136–174, 400–470 and 450–512MHz)
- Wide/narrow channel spacing (25, 12.5kHz) programmable
- PC programmable
- 3-color LED (Red, Green, Orange)
- Talk around function
- Time out timer
- Optional VOX headset
- 2-step power save

SPECIFICATIONS

| GENERAL | |
|-------------------------------|--|
| • Frequency coverage | : 136–174MHz IC-F3011 400–470, 450–512MHz IC-F4011 |
| • Channel spacing | : 12.5/25kHz, 15/30kHz |
| • Number of channels | : 16 channels |
| • PLL channel step | VHF : 2.5kHz, 3.125kHz UHF : 5kHz, 6.25kHz |
| • Power supply requirement | : 7.2V DC |
| • Current drain (approx.) | : Tx High (VHF) : 1.5A High (UHF) : 1.6A Rx Max. audio : 300mA Standby : 70mA |
| • Antenna impedance | : 50Ω |
| • Operating temperature range | : -30°C to +60°C ; -22°F to +140°F |
| • Dimensions (W×H×D) | : 53×120×38 mm (proj. not included) ; 2 ³ / ₃₂ ×4 ²³ / ₃₂ ×1 ¹ / ₂ in |
| • Weight (with BP-232N) | : 300g; 10.6oz |

| TRANSMITTER | |
|-----------------------------|--|
| • Output power (at 7.2V DC) | : 5W (VHF), 4W (UHF) |
| • Max. frequency deviation | : ±5.0kHz (at 25kHz) ±2.5kHz (at 12.5kHz) |
| • Frequency stability | : ±2.5ppm |
| • Spurious emissions | : 80dBc typ. |
| • Adjacent channel power | VHF : 80/70dB typ. (W/N) UHF : 75/68dB typ. (W/N) |
| • FM Hum and noise | : 46/40dB typ. (W/N) |
| • External mic. connector | : 3-conductor 2.5 (d) mm (1/16")/2.2kΩ |

| RECEIVER | |
|--------------------------------|--|
| • Sensitivity | : 0.25μV typ. (at 12dB SINAD) |
| • Squelch sensitivity | : 0.25μV typ. (at threshold) |
| • Adjacent channel selectivity | : 75/65dB typ. (W/N) |
| • Spurious response rejection | : 70dB min. |
| • Intermodulation rejection | : 74dB typ. |
| • Hum and noise | VHF : 50/45dB typ. (W/N) UHF : 45/40dB typ. (W/N) |

- Audio output power : 500mW (typical at 5% distortion with an 8Ω load) (at 7.2V DC)
- External speaker connector : 2-conductor 3.5 (d) mm (1/8")/8Ω

| Supplied accessories: | |
|--------------------------------|------------------------|
| • Battery pack, BP-232N | • Belt clip, MB-94 |
| • Battery charger, BC-160 | • AC adapter, BC-145SA |
| • Antenna (varies by versions) | |

Applicable U.S. Military Specifications & IP Rating

| Standard | MIL 810 F | |
|-------------------|-----------|-----------|
| | Method | Procedure |
| Low Pressure | 500.4 | I, II |
| High Temperature | 501.4 | I, II |
| Low Temperature | 502.4-3 | I, II |
| Temperature Shock | 503.4 | I |
| Solar Radiation | 505.4 | I |
| Rain | 506.4 | I, II |
| Humidity | 507.4 | - |
| Salt Fog | 509.4 | - |
| Dust | 510.4 | I |
| Vibration | 514.5 | I |
| Shock | 516.5 | I, IV |

Also meets equivalent MIL-STD-810-C, -D and -E.

| Ingress Protection Standard | |
|-----------------------------|---|
| Dust & Water | IP54 (Dust-protection and water resistance) |


Measurements made in accordance with TIA-603.
All stated specifications are subject to change without notice or obligation.

OPTIONS




| Battery packs | Type and capacity | Operating time* (VHF/UHF) |
|---------------|---|---------------------------|
| BP-230N | Li-Ion 7.4V 950/980mAh (min./typ.) | 7.35 hours |
| BP-232N | Li-Ion 7.4V 1900/2000mAh (min./typ.) | 16/15 hours |
| BP-240 | AAA (LR03) batteries × 6 | - |


* Tx: Rx: standby=5:5:90. Power save on. (at 20°C; 68°F)

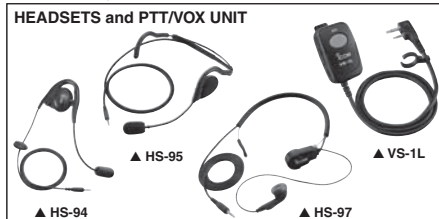

HS-94 : Earhook headset with flexible boom microphone.
HS-95 : Behind-the-head headset with flexible boom microphone.
HS-97 : Throat microphone fits around your neck and picks up speech vibration.
VS-1L : PTT/VOX unit. Required when using these headsets with the radio.



BC-160 DESKTOP CHARGER + BC-145SA AC ADAPTER
Charges the BP-232N in 3 hours (approx.).
BC-119N + AD-106 + BC-145SA is also available.



BC-171 DESKTOP CHARGER + BC-147SA AC ADAPTER
Charges the BP-232N in 10 hours (approx.).



BC-121N MULTI-CHARGER + AD-106 CHARGER ADAPTER + BC-157 AC ADAPTER
Rapidly charges up to 6 battery packs (Six AD-106s are required). Charging time: 3 hours (approx.) when BP-232N is attached.



HM-153L : Durable earphone-microphone with plug screw connector.
HM-158L : Compact and durable body with plug screw connector.
HM-159L : Full size durable speaker microphone with noise canceller and plug screw connector.
HM-166L : Light weight and compact lapel-microphone with revolving clip.
SP-13 : Earphone is also available.

- BELT CLIPS**
- **MB-93** : Swivel type belt clip.
 - **MB-94** : Alligator type. Same as supplied.
- LEATHER BELT HANGERS**
- **MB-96N** : Swivel type belt hanger.
 - **MB-96F** : Fixed type belt hanger.
- POWER SUPPLY CABLES**
- **CP-23L** : Cigarette lighter cable for use with BC-160 or BC-119N.
 - **OPC-515L** : Power supply cable for use with BC-160 or BC-119N.
 - **OPC-656** : Power supply cable for use with BC-121N.
- STUBBY ANTENNAS**
- **FA-SC56VS** : 150–162MHz
 - **FA-SC57VS** : 160–174MHz
 - **FA-SC73US** : 450–490MHz
60–80 mm antennas.
- CUT ANTENNAS**
- **FA-SC61VC** : 136–174MHz
 - **FA-SC61UC** : 380–520MHz
Cut the antenna element to tune to a specific center frequency.
- ANTENNAS**
- **FA-SC25V** : 136–150MHz
 - **FA-SC55V** : 150–174MHz
 - **FA-SC25U** : 400–430MHz
 - **FA-SC57U** : 430–470MHz
 - **FA-SC72U** : 470–520MHz

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world/

Count on us!

Your local distributor/dealer:

Icom America Inc.

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (425) 454-4266
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,
Kent, CT6 8LD, U.K.
Phone: +44 (0)1227 741741
Phone: +44 (0)1227 741742
Fax: +44 (0)1227 741742
E-mail: info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Phone: +886 (02) 2559 1874
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL : <http://www.asia-icom.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
E-mail: info@icom-europe.com
URL : <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejone des Moulains, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Phone: +33 (5) 61 36 03 00
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
E-mail: icom@icom-france.com
URL : <http://www.icom-france.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone: +86 (010) 5889 5391/5392/5393
Phone: +86 (010) 5889 5395
Fax: +86 (010) 5889 5395
E-mail: bjicom@bjicom.com
E-mail: bjicom@bjicom.com
URL : <http://www.bjicom.com>

PacTronics Inc

15375 Barranca Pkwy H108
Irvine, CA 92618-2209
800-607-2243 949-502-5599 FAX
www.pactronics.com

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Phone: +61 (03) 9549 7505
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
E-mail: sales@icom.net.au
URL : <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
E-mail: icom@icomspain.com
URL : <http://www.icomspain.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone: +48 (58) 550 71 35
Phone: +48 (58) 550 71 35
Fax: +48 (58) 551 0484
E-mail: icompolska@icompolska.com.pl
E-mail: icompolska@icompolska.com.pl
URL : <http://www.icompolska.com.pl>